
## Layer 2 Fast Ethernet Switches

## Managed Layer 2 Ethernet switches

Segmented workgroup switches for managed networks requiring uplinks to a server or backbone.

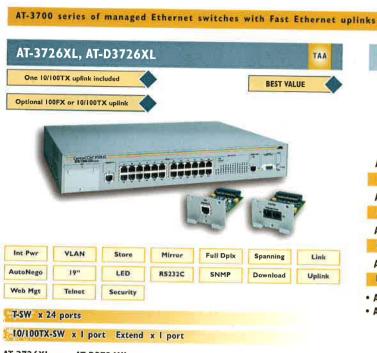


## AT-3726XL-xx AT-D3726XL-xx

xx = 10 for US power cord, 20 for no power cord, 30 for UK power cord,

50 for European power cord, 40 for Australian power cord

Physical specs: 440mm by 320mm by 66mm, 4.9 Kg, 17.3" x 12.6" x 2.6", 10.8lbs

- Supports 2,048 MAC addresses
- Dedicated port for port mirroring
- 802.10 VLAN tagging
- Features Web-based management
- Rackmounts included
- \*48VDC Powered ( AT-D3726XL only)

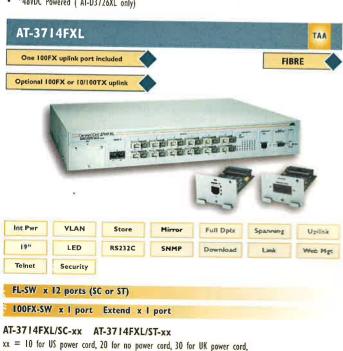



- AT-AII, A20, A2I has multi-mode fibre





## AT-3716XL-xx

xx = 10 for US power cord, 20 for no power cord, 30 for UK power cord,

50 for European power cord, 40 for Australian power cord

Physical specs: 440mm by 320mm by 66mm, 4.9 Kg, 17.3" x 12.6" x 2.6", 10.8lbs

- · Supports 2,048 MAC addresses
- · Dedicated port for port mirroring
- 802.1Q VLAN tagging
- · Features Web-based management Rackmounts included

50 for European power cord, 40 for Australian power cord

Physical specs: 440mm by 320mm by 66mm, 4.9 Kg, 17.3" x 12.6" x 2.6", 10.8lbs

. 802.1Q YLAN tagging

· Rackmounts included

· Supports 2,048 MAC addresses

· Dedicated port for port mirroring

• Features Web-based management