

# WA2600-822-PE Ceiling Mount Wi-Fi6 AP

## Datasheet

### Overview

The new generation series 802.11ax wireless access point WA2600-822-PE developed by Maipu is an indoor wireless access point that supports the latest 802.11ax technical standard. The product complies with the IEEE 802.11a/b/g/n/ac/ax standard, adopts high performance dual-band hardware design, four spatial streams, and the whole machine can provide up to 3Gbps access rate.

WA2600-822-PE adopts a built-in antenna design that is simple and elegant with convenient deployment. It supports ceiling mounting installation methods. It provides local DC and PoE two power supply modes, which can be flexibly selected according to the user environment. It is suitable for high-density, high-bandwidth and high-concurrency deployment scenarios such as enterprise conference room, university lecture room, office building corridor, etc.



WA2600-822-PE

### Highlight Features

- High performance hardware design support up to 3Gbps
- 802.11ax MU-MIMO technology supported
- Dual-band for high density wireless connection
- Central managed by WNC6600 series access controller
- Seamless layer2/3 roaming supporting
- Self-provisioning networking supporting
- Rich security features for wireless network

# Key Features

## ● High Performance Wi-Fi6 Access Point

WA2600-822-PE supports Dual-band concurrent 2.4GHz and 5.0GHz, and also supports Wi-Fi 6 (802.11ax) standard protocol. It adopts 1024QAM modulation mode. The 5GHz band supports 2 spatial streams with a maximum negotiated rate of 2.4Gbps, the 2.4GHz band supports 2 spatial streams with a maximum negotiated rate of 0.6Gbps. The total wireless access rate of the device can reach 3Gbps.

It also integrates MU-MIMO and OFDMA technologies to subdivide the wireless channel into more subchannels, enabling simultaneous communication with multiple terminal devices. When multiple users access the internet at the same time, the user experience is significantly improved. It supports BSS Color spatial reuse function to color and use different mechanisms to process the basic service set, reducing interference, improving channel utilization, and achieving effects such as intelligent load balancing and 5G priority. It improves the 5G band utilization and increases the total number of devices.

## ● Intelligent Forwarding Strategy

It supports centralized forwarding and local forwarding functions. According to business scenarios, intelligent forwarding strategies can be configured. By cooperating with Maipu Wireless Controller, the data forwarding mode of WA2600-822-PE can be flexibly configured. When configured as centralized forwarding, data packets are sent from the wireless access device to the wireless controller for unified forwarding.

It supports flexible configuration based on SSID or user VLAN. When configured as local forwarding mode, data packets can bypass the wireless controller and be directly converted into wired format packets for forwarding over the wired network, greatly relieving the traffic pressure of the wireless controller and releasing port bandwidth capabilities to reduce network bandwidth costs and overall improve network utilization.

## ● Comprehensive Security Protection

Together with the Maipu independently developed wireless controller, WA2600-822-PE supports 802.1x authentication, MAC authentication, WEB authentication and other authentication methods to ensure network security.

It supports Multiple SSID technology, WA2600-822-PE supports up to 16\*SSIDs, The administrator can set different passwords for each SSID, divide separate VLAN IDs, and easily achieve the effect of transmitting different services on different wireless networks (SSIDs). It can implement user isolation based on VLAN to ensure the security of data services in each VLAN.

It supports Wireless Intrusion Detection/Prevention (WIDS/WIPS), supports blacklist, whitelist and other wireless user access control features to detect, identify and counteract illegal wireless devices for effective blocking. At the same time, it also supports protection against ARP, SYN, port scanning and other network attacks to comprehensively build a secure and reliable network for users.

## ● Convenient Deployment and Intelligent Management

WA2600-822-PE can be automatically discovered by Maipu WNC6600 Series Wireless Controller and automatically download the configuration. The device automatically goes online with zero parameter configuration. It can be installed where wireless signal coverage is required to achieve truly flexible deployment, on-demand purchase and plug-and-play.

It can be managed by Maipu Matrix Center SNMP management system, this is a wired and wireless management platform for configuration management, topology management, fault management, performance monitoring, and upgrade management to greatly improve network operation efficiency.

## ● Environmentally Friendly Design and Energy Saving

WA2600-822-PE integrates energy-saving technologies such as target wake-up time technology, MIMO power saving technology, and packet power control technology. By reducing the number of terminal wake-ups, improving antenna efficiency, and integrating highly efficient power supply designs, it achieves energy saving and power saving.


# Technical Specifications

Product Model	WA2600-822-PE
<b>Interface Specification</b>	
Service Port	1*10/100/1000Mbps Base-T adaptive Ethernet copper port, 802.3af PoE (LAN1) 1*10/100/1000Mbps Base-T adaptive Ethernet copper port (LAN2)
USB Port	1*USB 2.0
Serial Console Interface	1*RJ45 Port
Power Interface	1*12VDC (Nominal, +/-5%)
Indicators	1*Multi-Color LED (For System and Radio status)
Reset Button	1*Rest Button (Factory reset; WPS)
<b>Environment Specification</b>	
Working Temperature	0°C to +45°C
Working Humidity	10% to 90% non-condensing
Storage Temperature	-40°C to +70°C
Storage Humidity	5% to 95% non-condensing
IP Rating	IP51
Weight	0.62 kg
Dimension(W*D*H)	197mm*197mm*58mm
<b>Hardware Specification</b>	
Installation Mode	Ceiling Mounting
Power Supply	Adapter: DC 12V/1.5A (optional) PoE Standard: IEEE 802.3af/802.3at-compliant (compatible). When both DC and PoE power sources are available, DC power takes priority over PoE.
Power Consumption	<13W (without USB output) The maximum transmit power of the AP complies with the regulations of different countries and regions
<b>Radio Specification</b>	
RF Design	Dual-band design: - Radio1: 2.4GHz, 2 streams: 2*2 - Radio2: 5GHz, 2 streams: 2*2
Operating Bands (Country-specific restrictions apply)	- Radio1: 2.400-2.4835GHz - Radio2: 5.150-5.350GHz, 5.47-5.725GHz, 5.725-5.850GHz
Transmission Rate	- 802.11b: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps - 802.11a/g: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps - 802.11n: 6.5Mbps-300Mbps (MCS0-MCS31, HT20-HT40), 400Mbps with 256-QAM - 802.11ac: 6.5Mbps-866Mbps (MCS0-MCS9, NSS=1-2, VHT20-VHT160) - 802.11ax (2.4GHz): 8.6Mbps-574Mbps (MCS0-MCS11, NSS=1-2, HE20-HE40) - 802.11ax (5GHz): 8.6Mbps-2,402Mbps (MCS0-MCS11, NSS = 1-2, HE20-HE160)
Antenna	Built-in Intelligent Antennas
Antenna Gain	2.4GHz: 3.0dBi 5GHz: 4.0dBi
Maximum Transmit Power	2.4GHz: +27 dBm 5GHz: +27 dBm


	The actual transmit power complies with the regulatory requirements for radio frequency emissions in various countries and regions
Transmit Power Adjustment	1 dBm
Modulation Mode	<ul style="list-style-type: none"> <li>- 802.11b: BPSK, QPSK, CCK</li> <li>- 802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM</li> <li>- 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM</li> <li>- 802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM</li> </ul>
Modulation and Encoding	<ul style="list-style-type: none"> <li>- Low Density Parity Check (LDPC)</li> <li>- Maximum Likelihood Detection (MLD)</li> </ul>
Advanced RF Features	<ul style="list-style-type: none"> <li>- TPC (Transmit Power Control)</li> <li>- ACS (Automatic Channel Scanning)</li> </ul>
<b>WIFI Specification</b>	
WIFI Standards	IEEE 802.11a/b/g/n/ac/ax
SSID Numbers	16*SSIDs
Channelization	20, 40, 80, 160 MHz
Recommend Users	64-128
Working Mode	Fit Mode
Security Type	Open, WPA-Personal, WPA-Enterprise, WPA2-Personal, WPA2-Enterprise, WPA3-Personal, WPA3-Enterprise, Portal
Working Bandwidth	<ul style="list-style-type: none"> <li>- 802.11ax: HE160, HE80, HE40, HE20</li> <li>- 802.11ac: VHT160, VHT80, VHT40, VHT20</li> <li>- 802.11n: HT40, HT20</li> </ul>
Date Rate	<ul style="list-style-type: none"> <li>- Radio1: 2.4GHz, 574Mbps</li> <li>- Radio2: 5GHz, 2.402Gbps</li> </ul>
MIMO Technologies	<ul style="list-style-type: none"> <li>- Multi-User Multiple Input Multiple Output (MU-MIMO)</li> <li>- Maximum Ratio Combining (MRC)</li> <li>- Space-Time Block Coding (STBC)</li> <li>- Cyclic Delay/Cyclic Shift Diversity (CDD/CSD)</li> <li>- Dynamic MIMO power saving</li> </ul>
Energy Saving	<ul style="list-style-type: none"> <li>- U-APSD</li> <li>- SM Power Save</li> <li>- Green AP mode</li> </ul>
Advanced WIFI Features	<ul style="list-style-type: none"> <li>- Orthogonal Frequency Division Multiple Access (OFDMA)</li> <li>- Short GI (Short Guard Interval)</li> <li>- DFS (Dynamic Frequency Selection)</li> <li>- Spectrum Navigation</li> </ul>

# Antenna Patterns

- 2.4GHz Wi-Fi (Antennas 1,2)

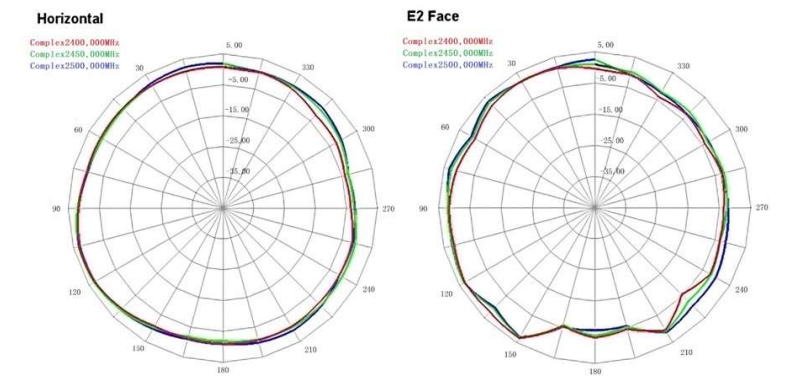


- 5GHz Wi-Fi (Antennas 1,2)

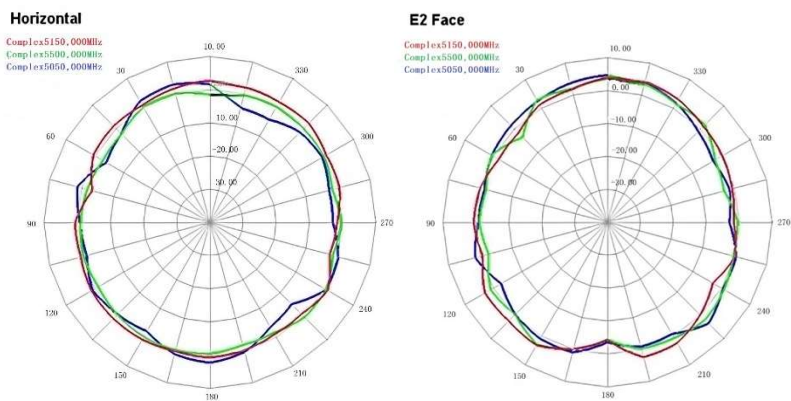

## Order Information

Model	Description
<b>WA2600 Series Wi-Fi6 Access Point</b>	
WA2600-822-PE	Ceiling mount Wi-Fi6 802.11a/b/g/n/ac/ax, Dual-band, Dual-mode, forwarding performance of the whole device 3Gbps, 2*2:2 MIMO, inbuilt antennas, PoE power supply mode, Two 1000M RJ45 interfaces; (installation accessory included)

## Application Scenario

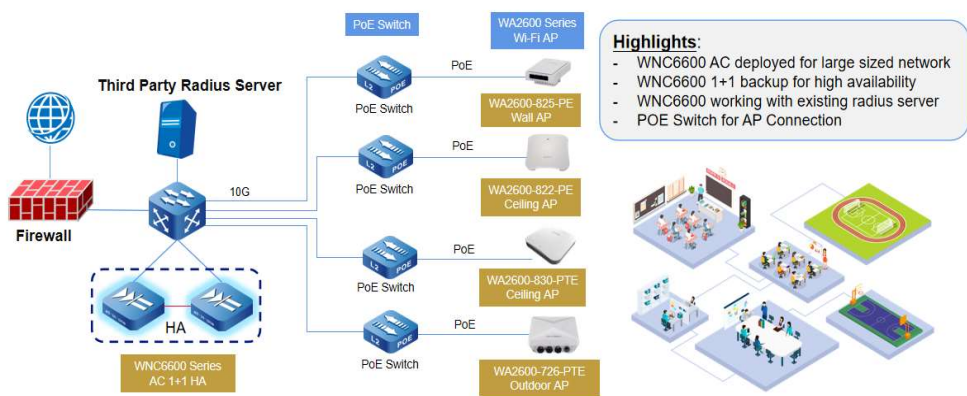

All rights reserved. Printed in the People's Republic of China.

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise without the prior written consent of Maipu Communication Technology Co., Ltd.

Maipu makes no representations or warranties with respect to this document contents and specifically disclaims any implied warranties of merchantability or fitness for any specific purpose. Further, Maipu reserves the right to revise this document and to make changes from time to time in its content without being obligated to notify any person of such revisions or changes.

Maipu values and appreciates comments you may have concerning our products or this document. Please address comments to:

*Maipu Communication Technology Co., Ltd*  
No.16, Jiuxing avenue  
Hi-Tech Zone  
Chengdu, Sichuan Province  
P. R. China  
610041  
Tel: (86) 28-65544850,  
**Fax:** (86) 28-65544948,  
**URL:** [http:// www.maipu.com](http://www.maipu.com)  
**Email:** [overseas@maipu.com](mailto:overseas@maipu.com)

All other products or services mentioned herein may be registered trademarks, trademarks, or service marks of their respective manufacturers, companies, or organizations.